


- Pour béton armé, ciment, pierres naturelles et artificielles
- Profondeur maximale de perçage 60 mm

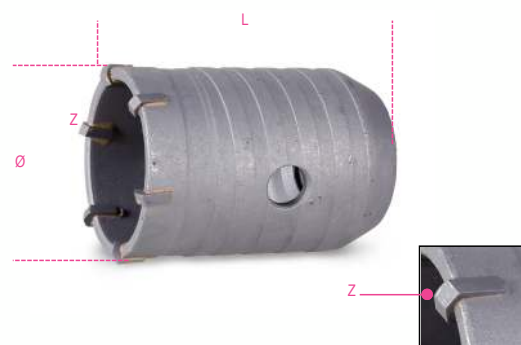

art.	art.	Ø mm	L mm	z
004600050	460 50	50	75	6
004600060	460 60	60	75	6
004600065	460 65	65	75	6
004600080	460 80	80	75	6
004600090	460 90	90	75	6
004600100	460 100	100	75	8
004600112	460 112	112	75	8
004600125	460 125	125	80	10
004600150	460 150	150	80	12