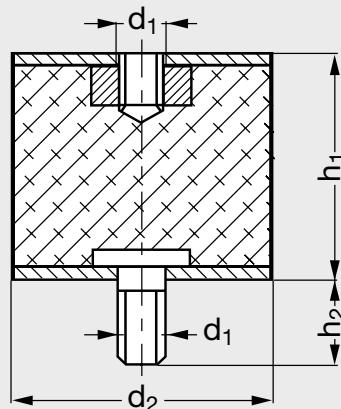


Support cylindrique élastique

type MF acier inoxydable

Acier
Inoxydable

Référence

Exemple de commande **F5-110-8-8**

● Délai maîtrisé ○ Contactez-nous

		d ₁	d ₂	h ₁	h ₂	h ₃	Compression		Cisaillement		Poids g
							charge maxi N	rigidité N/mm	charge maxi N	rigidité N/mm	
F5-110-8-8	●	M3	8	8	6	3	35	28	10	10	1
F5-110-10-10	●	M4	10	10	10	4	43	48	15	10	2,7
F5-110-10-15	●	M4	10	15	10	4	43	29	15	5	3,6
F5-110-15-15	●	M5	15	15	8	5	95	65	35	5	5
F5-110-15-20	●	M4	15	20	10	4	95	43	35	12	6
F5-110-15-30	●	M4	15	30	15	4	95	32	35	9	9
F5-110-20-15	●	M6	20	15	18	6	170	110	60	37	14
F5-110-20-20	●	M6	20	20	18	6	170	85	60	17	16
F5-110-20-25	●	M6	20	25	18	6	170	61	60	11	17

Produit associé



F5-100 Page 1058

Support cylindrique élastique

type MF acier inoxydable

Référence

● Délai maîtrisé ○ Contactez-nous

■ Exemple de commande **F5-110-8-8**

		d ₁	d ₂	h ₁	h ₂	h ₃	Compression		Cisaillement		Poids g
							charge maxi N	rigidité N/mm	charge maxi N	rigidité N/mm	
F5-110-25-15	●	M6	25	15	18	6	280	165	95	45	25
F5-110-25-20	●	M6	25	20	18	6	280	130	95	30	28
F5-110-25-25	●	M6	25	25	18	6	280	89	95	27	29
F5-110-25-30	●	M6	25	30	18	6	280	71	95	19	31
F5-110-30-15	●	M8	30	15	20	8	400	270	140	68	38
F5-110-30-20	●	M8	30	20	20	8	400	235	140	42	41
F5-110-30-25	●	M8	30	25	20	8	400	180	140	37	45
F5-110-30-30	●	M8	30	30	20	8	400	113	140	28	47
F5-110-30-40	●	M8	30	40	20	8	400	106	140	13	60
F5-110-40-25	●	M8	40	25	23	8	650	265	250	35	77
F5-110-40-30	●	M8	40	30	23	8	650	234	250	49	91
F5-110-40-40	●	M8	40	40	23	8	650	147	250	23	103
F5-110-50-20	●	M10	50	20	28	10	1000	450	400	95	112
F5-110-50-25	●	M10	50	25	28	10	1000	425	400	82	125
F5-110-50-30	●	M10	50	30	28	10	1000	395	400	73	135
F5-110-50-40	●	M10	50	40	28	10	1000	273	400	58	168
F5-110-50-45	●	M10	50	45	33	10	1000	250	400	50	174
F5-110-50-50	●	M10	50	50	28	10	1000	210	400	37	183
F5-110-60-40	●	M10	60	40	28	10	1500	390	550	63	224
F5-110-70-45	●	M10	70	45	28	10	1800	450	700	72	348
F5-110-75-25	●	M12	75	25	37	12	2300	980	850	270	299
F5-110-75-40	●	M12	75	40	37	12	2300	735	850	118	384
F5-110-75-45	●	M12	75	45	37	12	2300	690	850	105	417
F5-110-75-50	●	M12	75	50	37	12	2300	530	850	101	467
F5-110-75-55	●	M12	75	55	37	12	2300	500	850	90	469
F5-110-100-40	●	M16	100	40	41	16	4200	2160	1600	283	716
F5-110-100-50	●	M16	100	50	41	16	4200	950	1600	220	808
F5-110-100-55	●	M16	100	55	41	16	4200	870	1600	170	841
F5-110-100-60	●	M16	100	60	41	16	4200	843	1600	142	866
F5-110-100-75	●	M16	100	75	41	16	4200	750	1600	110	1026